


1. **NOTE: Remove and discard weatherstrip gasket from leading edge of hood if applicable.** Clean the leading edge of hood with an alcohol pad.
2. Remove tape liner from adhesive strips on all flanges.
3. Align hood shield holes with holes in hood.
4. Assemble fastener by threading screw into receptacle. Insert (1) fastener and screw until snug. Repeat for remaining (3) fasteners. (See detail below)
5. Apply pressure to all flanges to ensure adhesion of tape.
6. Install (3) bump ons at pre-cleaned locations on the top of the grille. (See detail below)
7. Close hood and install (3) bump ons at pre-cleaned locations on the painted hood surface. (See detail below)

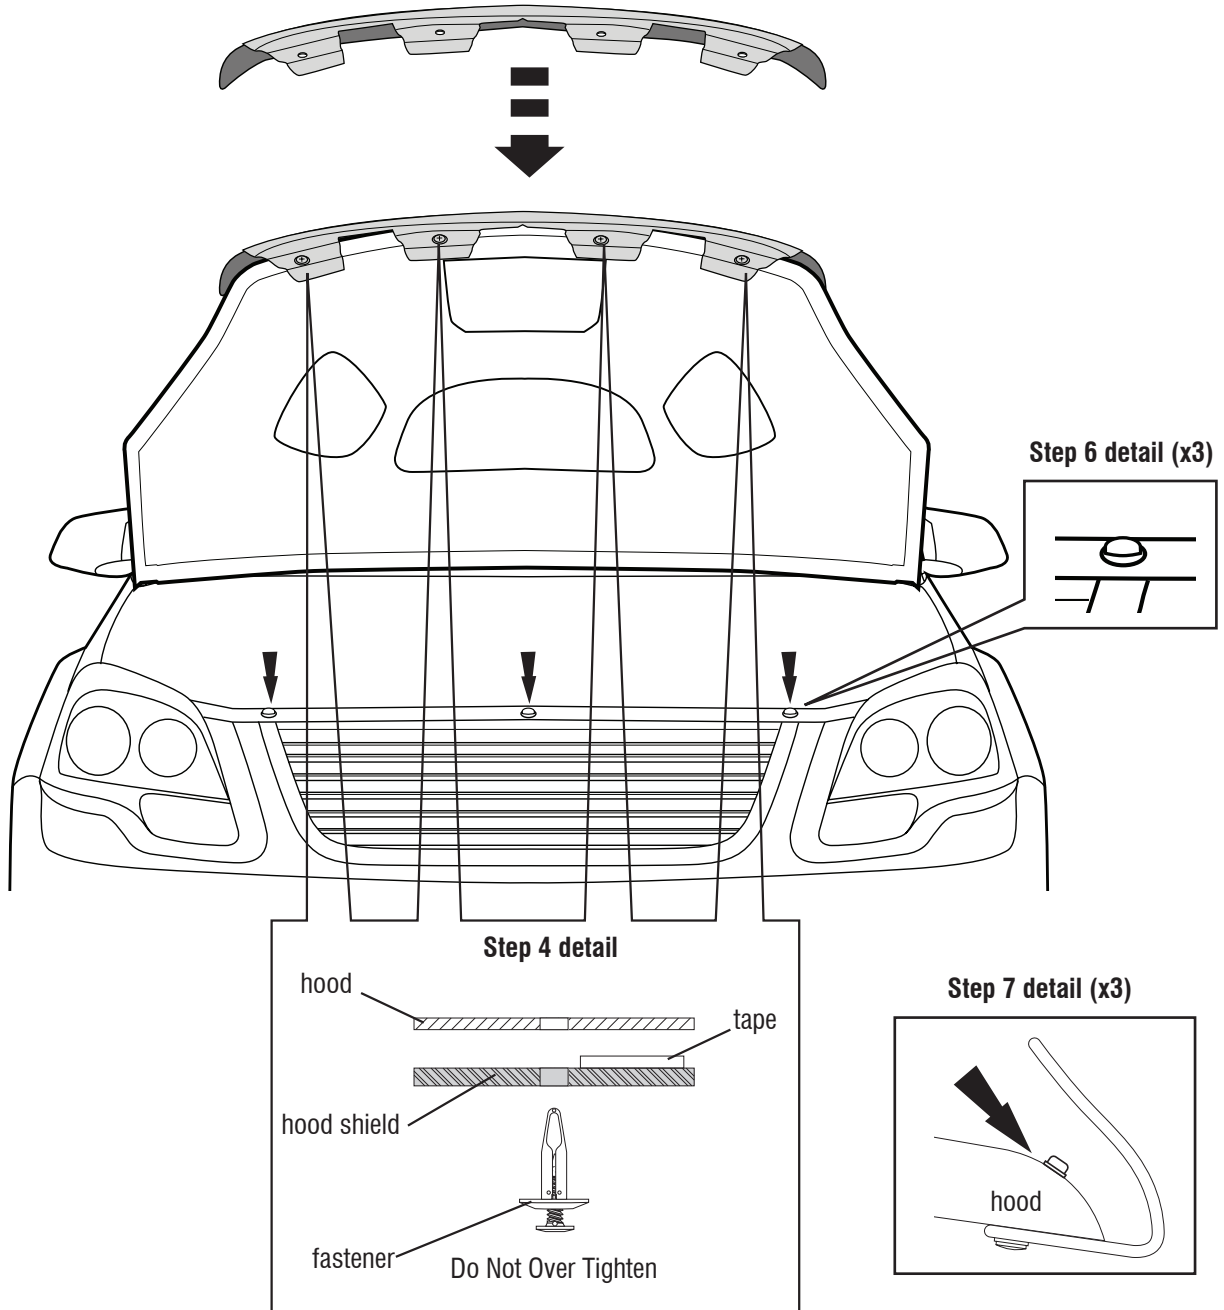

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.