
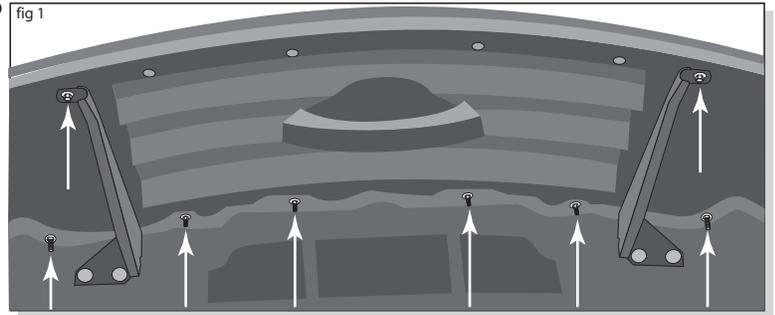


# NO DRILL HOOD PROTECTOR INSTALLATION INSTRUCTIONS

**1** Remove the 6 nuts and 2 bolts that attach the grill assembly to the hood (Fig 1) with a 10mm nut driver. Lower the hood

**2** There are 5 hidden metal clips under the top edge of the grill that need to be released in order to remove the assembly (Fig 2). Starting at either end, place one hand at the top of the grill and simultaneously pull UP and OUT at a 45° angle. **(NOTE: There are 6 styles of grill for this vehicle, most will allow you to place your hand through the grill at the top for better leverage.)**

While simultaneously pulling UP and OUT at a 45° angle use your other hand with your palm facing up to strike the bottom of the grill and pop the clip free.

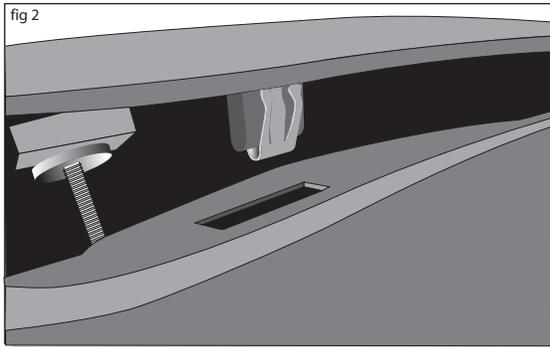

**KIT CONTAINS:**  
HOOD PROTECTOR  
4 GROMMET NUTS  
4 WASHERS  
4 SCREWS  
ALCOHOL PADS



**TOOLS REQUIRED:**  
10 mm NUT DRIVER  
PHILLIPS SCREWDRIVER

**3** Repeat this process on the opposite side of the grill. After the 2 outer clips have been released repeat the process for the inner 2 clips and finally the center clip (See fig 3 for location of clips). Once the 5 clips have been released the grill assembly can be removed and set aside.

**4** Locate the slotted holes on the outer edges on the underside of the hood and install 4 plastic grommet nuts from the hardware pack into the holes.

**5** Peel back 1" of the red backing from the adhesive strip on the Hood Protector and leave hanging. Hold the Hood Protector to the hood and take note of where the adhesive will contact the hood. Clean the area with the alcohol pad provided in the hardware pack.

**6** Using screws with washers, attach the Hood Protector to the hood into the holes with the grommet nuts (Fig 4). Check to see that the Hood Protector is centered on the hood, loosen screws and re-center if necessary.

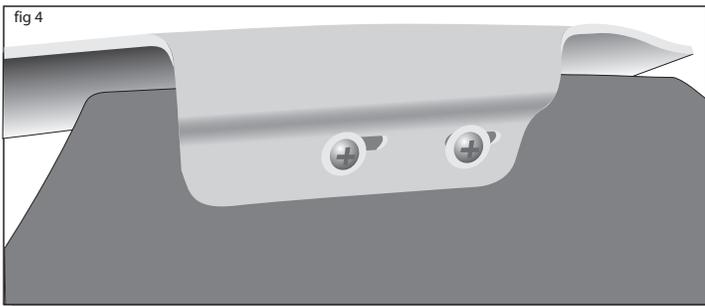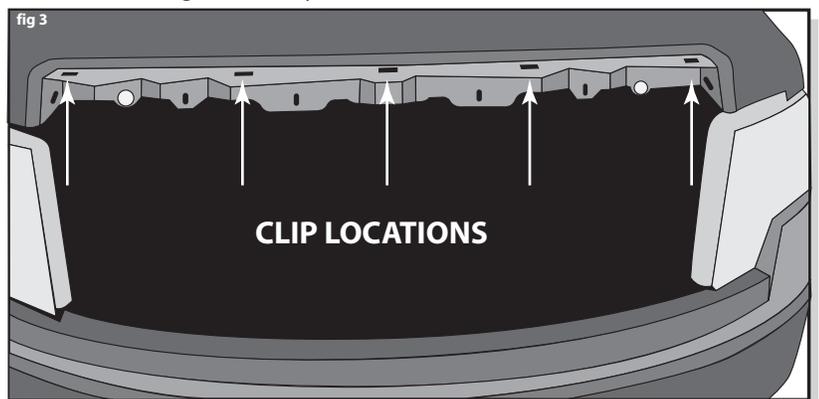

**7** Adhere the center of the Hood Protector to the hood by grasping the hanging red backing on the adhesive strip and removing it from the adhesive. Apply firm pressure to set into place.

**8** Re-install the grill by lining up the 5 tabs with clips to the corresponding slots in the hood. Once the grill is in place push downward on the top of the grill assembly to lock the clips into place.

**9** Raise the hood and re-install the 6 nuts and 2 bolts that attach the grill assembly to the hood.

**CLEANING:** USE ONLY SOAPY WATER AND A SOFT CLOTH. NEVER USE PAPER TOWELS, PETROLEUM PRODUCTS OR SOLVENTS TO CLEAN YOUR HOOD PROTECTOR.