
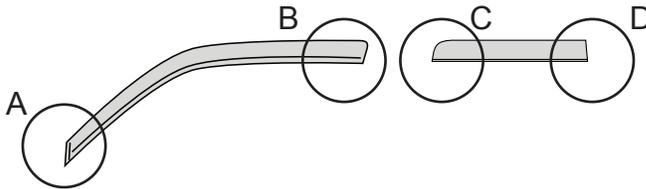





Visors are designed to be placed inside the window channel.




70°-100° F (Install temp.)

- 1 Roll down window. Buff the inside felt surface with Scotch Brite pad. Then clean with alcohol pad.
- 2 Remove the tape from the front and rear flanges. Peel back 2" of tape liner from each end of top flange.
- 3 Slide the front end flange of the visor into position **outside** the window channel **between rubber trim and mirror cap**. Then rotate visor up and slide top and rear flanges **inside** the window channel. **NOTE:** Proper placement is important to prevent window from breaking flange during operation.
- 4 Press the exposed area of tape against the surface and verify position.
- 5 With the visor in final position, remove the remainder of the tape liner by pulling on free ends.
- 6 Apply pressure along the inside of window channel and flange edges to secure in place.
- 7 Roll up window and leave window up for 24 hours to ensure proper adhesion.
- 8 The drivers side rear visor attaches to the felt surface following the same procedure.

**A****B****C****D**




IMPORTANT: Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.
Stampede Automotive Products • Visit us at stampedeproducts.com • 800-241-7219

Visors are designed to be placed inside the window channel.

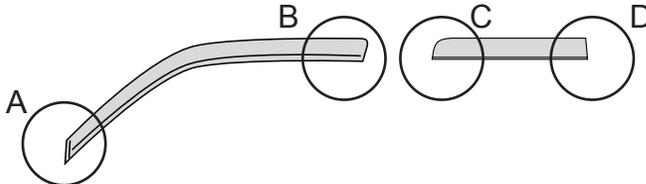

70°-100° F (Install temp.)

- 1 Roll down window. Buff the inside felt surface with Scotch Brite pad. Then clean with alcohol pad.
- 2 Remove the tape from the front and rear flanges. Peel back 2" of tape liner from each end of top flange.
- 3 Slide the front end flange of the visor into position **outside** the window channel **between rubber trim and mirror cap**. Then rotate visor up and slide top and rear flanges **inside** the window channel. **NOTE:** Proper placement is important to prevent window from breaking flange during operation.
- 4 Press the exposed area of tape against the surface and verify position.
- 5 With the visor in final position, remove the remainder of the tape liner by pulling on free ends.
- 6 Apply pressure along the inside of window channel and flange edges to secure in place.
- 7 Roll up window and leave window up for 24 hours to ensure proper adhesion.
- 8 The drivers side rear visor attaches to the felt surface following the same procedure.

**A****B****C****D**

IMPORTANT: Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.
Stampede Automotive Products • Visit us at stampedeproducts.com • 800-241-7219